



dormakaba compact reader 91 10

Award-winning design and elegance

The dormakaba compact reader 91 10 with elegant high-gloss finish can be integrated easily into existing buildings.

It is convenient to operate – as both

visible and audible signals are used to confirm access. Simply present either a card, key fob or key with RFID transponder clip to the reader and enter.

Flexible integration

The dormakaba compact reader 91 10 can be integrated into all dormakaba systems, regardless of whether they are operated online or stand-alone.

The quickwire connector simplifies installation and maintenance. The reader is simply clicked onto the pre-wired rear panel or spacer frame.

Areas of application

The dormakaba compact reader 91 10 fits onto any standard wall socket and is available in two designs:

- with a spacer frame for use indoors (surface wiring) or
- with rear panel and sealing pad for use in protected outdoor areas (flush-mounted wiring).

The dormakaba compact reader 91 10 can be used in many ways. It can be used either as a reader to monitor the organisation or for access control in conjunction with an access manager in protected areas.

Areas of application

- Office buildings
- Automatic doors
- Lifts
- Garage doors
- Car park barriers
- Entrance areas
- Doors with motor locks

Advantages at a glance

Elegant design

Contemporary, award-winning design with a high-gloss finish

Simple to install

Thanks to quickwire technology, the reader can be plugged onto the base frame quickly and easily

Retrofitting possible

It is possible to use existing wiring

Seamless integration

Functions in dormakaba Online, CardLink or stand-alone operation

Safe investment

Expandable, as it can be combined with a number of dormakaba access systems

Secure in the future

Ready for use with dormakaba Mobile Access

Features

Intuitive user guidance

The RFID access medium is held in front of the reader unit. A sound and a light signal (green/red) indicate whether access is granted or denied. Access to the desired area can be made – whether through car park barriers, automatic sliding doors, lifts, barriers or doors with a motor lock or door opener.

Versatile

The dormakaba compact reader 91 10 is mounted indoors or in protected outdoor areas. For example, with the optional Kaba CardLink function it can be used as a validation reader in entrance areas and new temporary authorisations saved directly to the card each day. Indoors, the reader is the ideal solution for lifts or sliding doors: access is controlled in an area- and time-specific manner.

Scalable use

The compact reader is suitable both for individual access points and as part of a large system. Many versions are available with different programming options, depending on the object size and requirements.

Simple

The reader can be replaced quickly and simply in existing systems. Thanks to flexible firmware exchange, it can be integrated seamlessly into various dormakaba systems.


A universal portfolio

dormakaba's product range includes combinable products that share the same high-quality design.


Note: The product's range of available functions depends on the system context in which it is used.

dormakaba compact reader 91 10

Front and rear panel

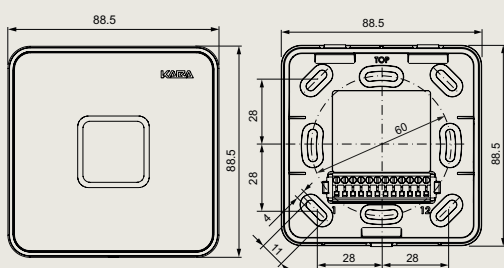

Side view



flush-mounted surface mounted

Technical specification

Supported RFID technologies

- LEGIC (advant & prime)
- MIFARE (DESFire & Classic)

Design / material / dimensions

- flush-mounted type (rear panel/sealing pad): 88,5 x 88,5 x 19,4 mm (WxH xD)
- surface mounted type (spacer frame): 88,5 x 88,5 x 26,4 mm
- front: PC plastic, colour: RAL 9005 jet black, RAL 9016 white
- frame: plastic; colour: RAL 9006 white aluminium
- rear panel/spacer frame: colour: RAL 9005, RAL 9016

Interfaces

- RS-485: connection to host; galvanically isolated, differential
- two binary inputs: max. 5 VDC
- 1 relay output: max. 34 VDC/60 W, max. 27 VAC/60 VA

Power supply

- 12–27 VAC, 50/60 Hz or 10–34 VDC
- power consumption: typ. 1.2 W, max. 2.2 W
- clock operates max. 120 hours without power supply

Environmental conditions

- temperature: – 25 °C – +70 °C
- protection class: flush-mounted design: IP54 surface mounted design: IP40
- humidity: 0 – 95 %, noncondensing

Certificates / standards

- EN 301 489-1, EN 301 489-3, EN 300 330-1, EN 300 330-2
- RED 2014/53/EU

Access2

Unit 35

North Tyne Industrial Estate

Longbenton

Newcastle-upon-Tyne

NE12 9SZ

tel: +44(0)191 215 0530

email: enquiries@access2.com

web: www.access2.com