

tedee



Enter in a new way.

tedee bridge - Data Sheet

ACCESS 2
SECURITY | CONTROL | ACCESS



tedee **bridge**

It connects to your tedee with Bluetooth and the internet via Wi-Fi. Like a bridge between your smart lock and the global network.

Using a bridge gives you features available only in the online mode: auto-unlock, remote opening, notifications and auto-updates.

It also enables more opportunities for integration with voice assistants and smart home systems.


You can plug it directly into a power socket or connect it with a micro USB cable, up to 2m away from your lock.

tedee bridge

Technical Specification

Model	TBV1.0
Weight	51.6g
Dimensions	64.5mm x 63.5mm x 28mm
Operating temperature	10-40°C (indoor only)
Operating humidity	max. 65%
Made in	Poland, EU
Power supply	5V = 300mA
Power connection	Socket plug (included) or micro USB (cable not included)
Wi-Fi communication	2,4 GHz
Bluetooth communication	BLE 5.0 2,4GHz
Security protocol	TLS 1.3
Recommended setup	max. 2 m from tedee lock; 1-10 m from Wi-Fi router
Works with smart home systems	Apple HomeKit, Google Assistant, Amazon Alexa, Homey, Fibaro, Grenton, eeDomus, Consolomio

Whats in the box:

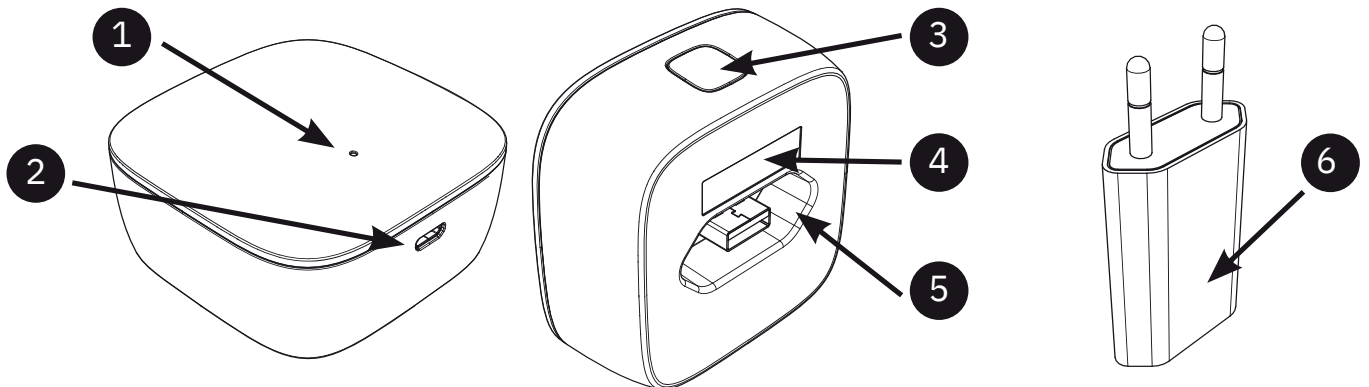

- 1. LED
- 2. Micro USB port

- 3. The button
- 4. Activation code (QR)

- 5. USB port
- 6. USB charger

Enter the smart world.

Send an email to sales@access.com or
call **+44 (0)191 215 0530** to place an order

access2.com

 [Access2](#)

 [Access2hq](#)

 [Access2hq](#)

Google and Google Home are trademarks of Google LLC. Amazon Alexa and all related marks are trademarks of Amazon.com, Inc. or its affiliates. Apple, HomeKit, and Siri are trademarks of Apple Inc. registered in the U.S. and other countries. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. All other trademarks are properties of their respective owners.