

tedee



# Enter in a new way.

tedee pro - Data Sheet

ACCESS 2

SECURITY | CONTROL | ACCESS



## tedee **pro**

Battery-powered mechanism mounted on the inside of your door. Charge as little as every 14 months, when used up to 8 times per day.

Locks and unlocks with a button or click on the app.

Connects to tedee bridge for remote features and integration with smart home systems.

Requires a dedicated cylinder or adapter for your lock type.



Available in white/silver and graphite colourways.

# tedee pro

## Technical Specification

Model	TLV1.0
Weight	196 g
Dimensions	Ø 45 mm x 55 mm
Operating temperature	10-40°C (indoor only)
Operating humidity	max. 65%
Torque	2.0 Nm
Made in	Poland, EU
Power supply	3000 mAh LiPo battery
Battery life	Up to 6-10 months
Power source	Micro USB. Box includes a dedicated cable with a magnetic plug.
Security	TLS 1.3

## Whats in the box:

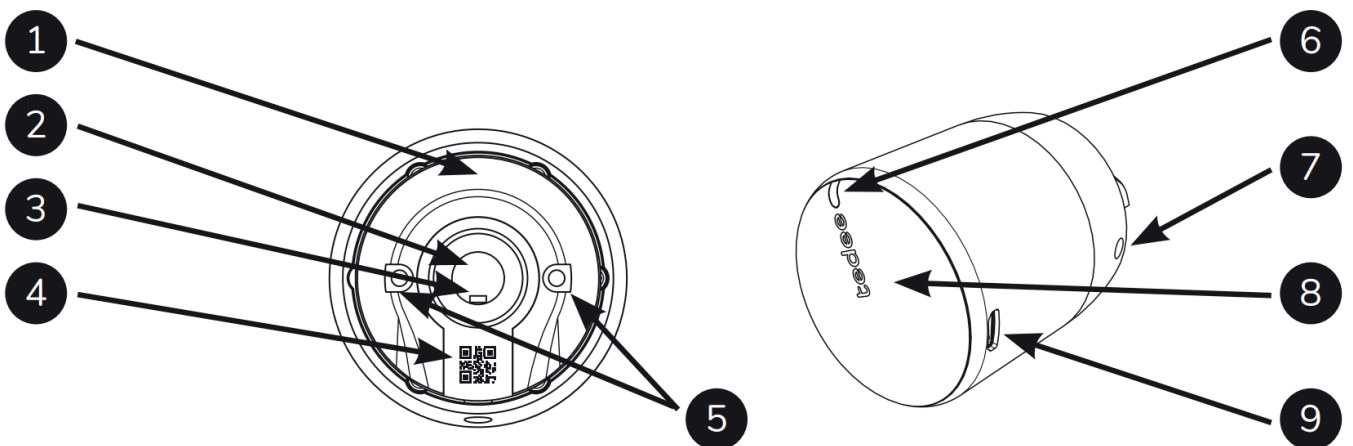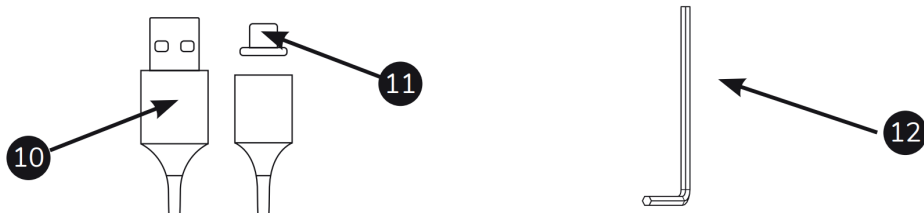

- 1. Activation code
- 2. Cylinder shaft mounting hole
- 3. Mounting screw

- 4. Activation code (QR)
- 5. Adapter mounting holes (optional)

- 6. LED
- 7. Allen key hole

- 8. The button
- 9. Micro USB charging port

- 10. USB connector
- 11. Magnetic micro USB adapter
- 12. Allen key (size 2)

# Enter the smart world.

Send an email to [sales@access.com](mailto:sales@access.com) or  
call **+44 (0)191 215 0530** to place an order

[access2.com](http://access2.com)

 [Access2](#)

 [Access2hq](#)

 [Access2hq](#)